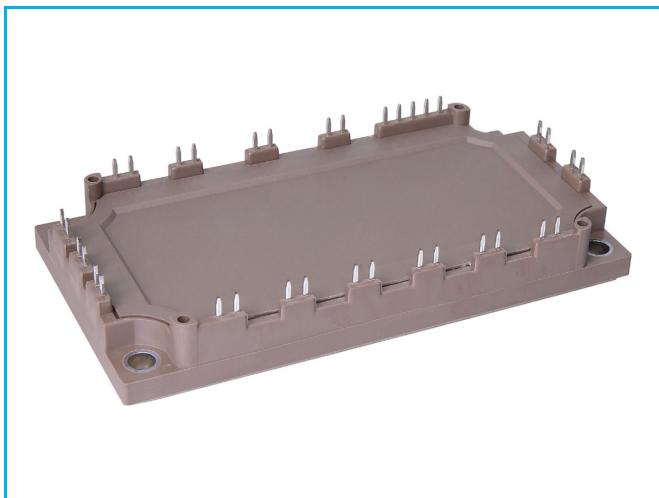


## PRODUCT FEATURES

- High level of integration
- IGBT CHIP(Trench+Field Stop technology)
- Low saturation voltage and positive temperature coefficient
- Fast switching and short tail current
- Free wheeling diodes with fast and soft reverse recovery
- Industry standard package with insulated copper base plate and soldering pins for PCB mounting
- Temperature sense included


Rectifier+Inverter

## APPLICATIONS

- AC motor control
- Motion/servo control
- Inverter and power supplies

## IGBT-inverter

### ABSOLUTE MAXIMUM RATINGS( $T_c=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions		Values	Unit
$V_{CES}$	Collector Emitter Voltage	$T_J=25^\circ\text{C}$	1200	V
$V_{GES}$	Gate Emitter Voltage		$\pm 20$	
$I_C$	DC Collector Current	$T_c=25^\circ\text{C}, T_{Jmax}=175^\circ\text{C}$	76	A
		$T_c=100^\circ\text{C}, T_{Jmax}=175^\circ\text{C}$	50	
$I_{CM}$	Repetitive Peak Collector Current	$t_p=1\text{ms}$	100	
$P_{tot}$	Power Dissipation Per IGBT	$T_c=25^\circ\text{C}, T_{Jmax}=175^\circ\text{C}$	278	W

## Diode-inverter

### ABSOLUTE MAXIMUM RATINGS ( $T_c=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions		Values	Unit
$V_{RRM}$	Repetitive Reverse Voltage	$T_J=25^\circ\text{C}$	1200	V
$I_{F(AV)}$	Average Forward Current		50	
$I_{FRM}$	Repetitive Peak Forward Current	$t_p=1\text{ms}$	100	A
$I^2t$		$T_J=125^\circ\text{C}, t=10\text{ms}, V_R=0\text{V}$	650	

MacMic Science & Technology Co., Ltd.

Add: #18, Hua Shan Zhong Lu, New District, Changzhou City, Jiangsu Province, P. R. of China

# MMG50W120XT6TC

IGBT-inverter

ELECTRICAL CHARACTERISTICS ( $T_C=25^\circ\text{C}$  unless otherwise specified)

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit	
$V_{GE(\text{th})}$	Gate Emitter Threshold Voltage	$V_{CE}=V_{GE}$ , $I_C=2\text{mA}$	5.0	5.8	6.5	V	
$V_{CE(\text{sat})}$	Collector - Emitter Saturation Voltage	$I_C=50\text{A}$ , $V_{GE}=15\text{V}$ , $T_J=25^\circ\text{C}$		1.8	2.25		
		$I_C=50\text{A}$ , $V_{GE}=15\text{V}$ , $T_J=125^\circ\text{C}$		2.1			
		$I_C=50\text{A}$ , $V_{GE}=15\text{V}$ , $T_J=150^\circ\text{C}$		2.15			
$I_{CES}$	Collector Leakage Current	$V_{CE}=1200\text{V}$ , $V_{GE}=0\text{V}$ , $T_J=25^\circ\text{C}$			1	mA	
		$V_{CE}=1200\text{V}$ , $V_{GE}=0\text{V}$ , $T_J=150^\circ\text{C}$			10		
$I_{GES}$	Gate Leakage Current	$V_{CE}=0\text{V}$ , $V_{GE}=\pm 20\text{V}$ , $T_J=25^\circ\text{C}$	-400		400	nA	
$R_{\text{gint}}$	Integrated Gate Resistor			3		$\Omega$	
$Q_g$	Gate Charge	$V_{CE}=600\text{V}$ , $I_C=50\text{A}$ , $V_{GE}=15\text{V}$		0.27		$\mu\text{C}$	
$C_{ies}$	Input Capacitance	$V_{CE}=25\text{V}$ , $V_{GE}=0\text{V}$ , $f=1\text{MHz}$		3.5		nF	
$C_{res}$	Reverse Transfer Capacitance				160	pF	
$t_{d(\text{on})}$	Turn on Delay Time	$V_{CC}=600\text{V}$ , $I_C=50\text{A}$ , $R_G=10\Omega$ , $V_{GE}=\pm 15\text{V}$ , Inductive Load	$T_J=25^\circ\text{C}$		30	ns	
			$T_J=125^\circ\text{C}$		35	ns	
			$T_J=150^\circ\text{C}$		35	ns	
$t_r$	Rise Time		$T_J=25^\circ\text{C}$		25	ns	
			$T_J=125^\circ\text{C}$		30	ns	
			$T_J=150^\circ\text{C}$		30	ns	
$t_{d(\text{off})}$	Turn off Delay Time	$V_{CC}=600\text{V}$ , $I_C=50\text{A}$ , $R_G=10\Omega$ , $V_{GE}=\pm 15\text{V}$ , Inductive Load	$T_J=25^\circ\text{C}$		260	ns	
			$T_J=125^\circ\text{C}$		310	ns	
			$T_J=150^\circ\text{C}$		330	ns	
$t_f$	Fall Time		$T_J=25^\circ\text{C}$		100	ns	
			$T_J=125^\circ\text{C}$		170	ns	
			$T_J=150^\circ\text{C}$		200	ns	
$E_{on}$	Turn on Energy	$V_{CC}=600\text{V}$ , $I_C=50\text{A}$ , $R_G=10\Omega$ , $V_{GE}=\pm 15\text{V}$ , Inductive Load	$T_J=125^\circ\text{C}$		4.5	mJ	
			$T_J=150^\circ\text{C}$		5.2	mJ	
$E_{off}$	Turn off Energy		$T_J=125^\circ\text{C}$		4.1	mJ	
			$T_J=150^\circ\text{C}$		4.7	mJ	
$I_{sc}$	Short Circuit Current	$tpsc \leq 10\mu\text{s}$ , $V_{GE}=15\text{V}$ $T_J=125^\circ\text{C}$ , $V_{CC}=800\text{V}$			215	A	
$R_{\text{thJC}}$	Junction to Case Thermal Resistance (Per IGBT)				0.54	K /W	

Diode-inverter

ELECTRICAL CHARACTERISTICS ( $T_C=25^\circ\text{C}$  unless otherwise specified)

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit
$V_F$	Forward Voltage	$I_F=50\text{A}$ , $V_{GE}=0\text{V}$ , $T_J=25^\circ\text{C}$		1.8	2.3	V
		$I_F=50\text{A}$ , $V_{GE}=0\text{V}$ , $T_J=125^\circ\text{C}$		1.55		
		$I_F=50\text{A}$ , $V_{GE}=0\text{V}$ , $T_J=150^\circ\text{C}$		1.5		
$t_{rr}$	Reverse Recovery Time	$I_F=50\text{A}$ , $V_R=600\text{V}$ $dI_F/dt=-1500\text{A}/\mu\text{s}$		350		ns
$I_{RRM}$	Max. Reverse Recovery Current			75		A
$Q_{RR}$	Reverse Recovery Charge	$T_J=150^\circ\text{C}$		11		$\mu\text{C}$
$E_{rec}$	Reverse Recovery Energy			3.6		mJ
$R_{\text{thJCD}}$	Junction to Case Thermal Resistance ( Per Diode)				0.81	K /W

# MMG50W120XT6TC

---

## Diode-RECTIFIER

**ABSOLUTE MAXIMUM RATINGS ( $T_C=25^\circ\text{C}$  unless otherwise specified)**

Symbol	Parameter/Test Conditions		Values	Unit
$V_{RRM}$	Repetitive Reverse Voltage	$T_J=25^\circ\text{C}$	1600	V
$I_{FRMS}$	R.M.S. Forward Current Per Diode	$T_C=80^\circ\text{C}$	100	A
$I_{RMS}$	R.M.S. Current at rectifier output		150	
$I_{FSM}$	Non Repetitive Surge Forward Current	$T_J=45^\circ\text{C}$ , $t=10\text{ms}$ , 50Hz	740	A
		$T_J=45^\circ\text{C}$ , $t=8.3\text{ms}$ , 60Hz	814	
$I^2t$		$T_J=45^\circ\text{C}$ , $t=10\text{ms}$ , 50Hz	2738	$\text{A}^2\text{S}$
		$T_J=45^\circ\text{C}$ , $t=8.3\text{ms}$ , 60Hz	2749	

## Diode-RECTIFIER

**ELECTRICAL CHARACTERISTICS ( $T_C=25^\circ\text{C}$  unless otherwise specified)**

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit
$V_F$	Forward Voltage	$I_F=50\text{A}$ , $T_J=25^\circ\text{C}$		1.05	1.25	V
		$I_F=50\text{A}$ , $T_J=150^\circ\text{C}$		0.97		V
$I_R$	Reverse Leakage Current	$V_R=1600\text{V}$ , $T_J=25^\circ\text{C}$			50	$\mu\text{A}$
		$V_R=1600\text{V}$ , $T_J=150^\circ\text{C}$			1	mA
$R_{thJCD}$	Junction to Case Thermal Resistance ( Per Diode)				0.63	K /W

# MMG50W120XT6TC

## NTC CHARACTERISTICS ( $T_c = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit
$R_{25}$	Resistance	$T_c = 25^\circ\text{C}$		5		$\text{k}\Omega$
$B_{25/50}$	$R_2 = R_{25} \exp [B_{25/50}(1/T_2 - 1/(298.15 \text{ K}))]$			3375		K

## MODULE CHARACTERISTICS ( $T_c = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions	Values	Unit
$T_{Jmax}$	Max. Junction Temperature	Inverter	175
		Rectifier	150
$T_{Jop}$	Operating Temperature	-40~150	$^\circ\text{C}$
$T_{stg}$	Storage Temperature	-40~125	
$V_{isol}$	Isolation Breakdown Voltage	AC, 50Hz(R.M.S), t=1minute	V
CTI	Comparative Tracking Index	>200	
Md	Mounting Torque	Recommended (M5)	Nm
Weight		300	g

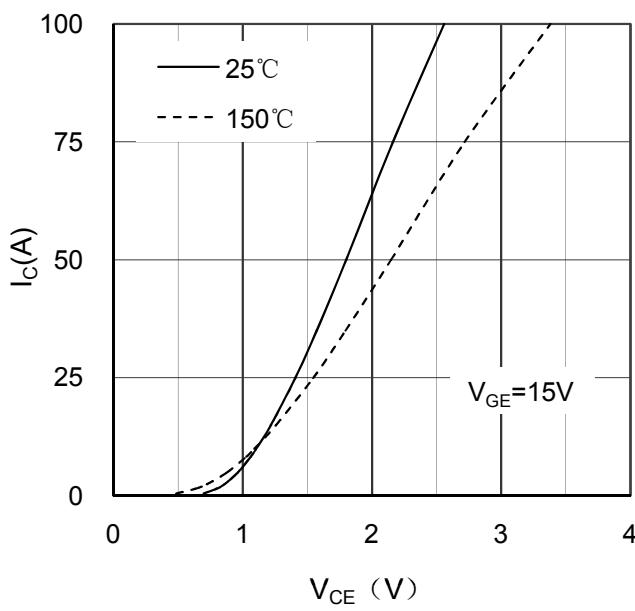


Figure 1. Typical Output Characteristics IGBT-inverter

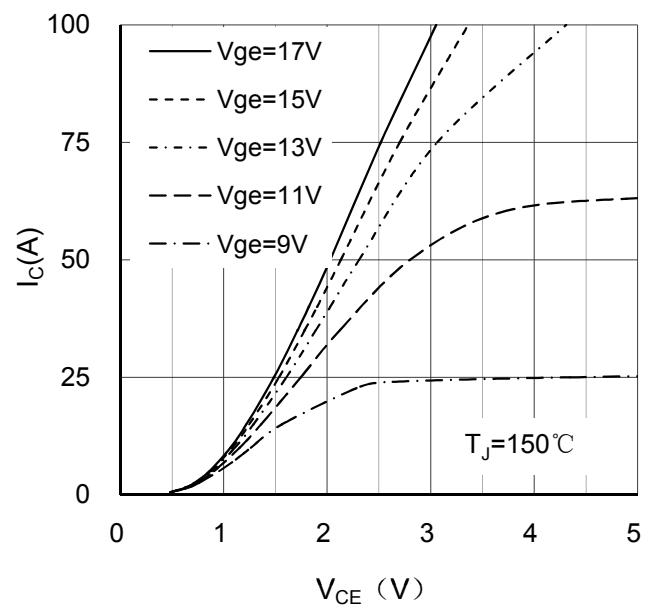


Figure 2. Typical Output Characteristics IGBT-inverter

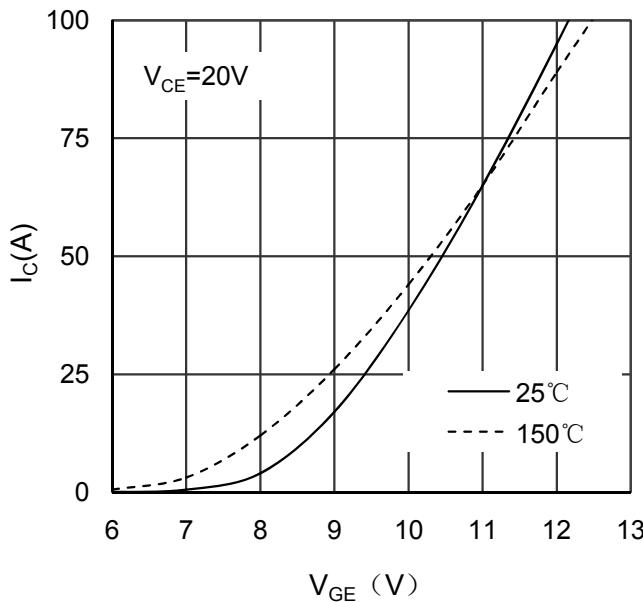


Figure 3. Typical Transfer characteristics IGBT-inverter

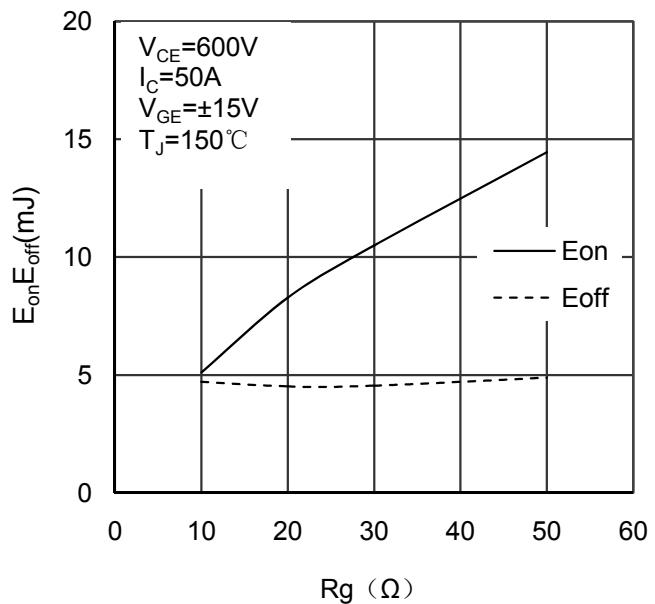


Figure 4. Switching Energy vs Gate Resistor IGBT-inverter

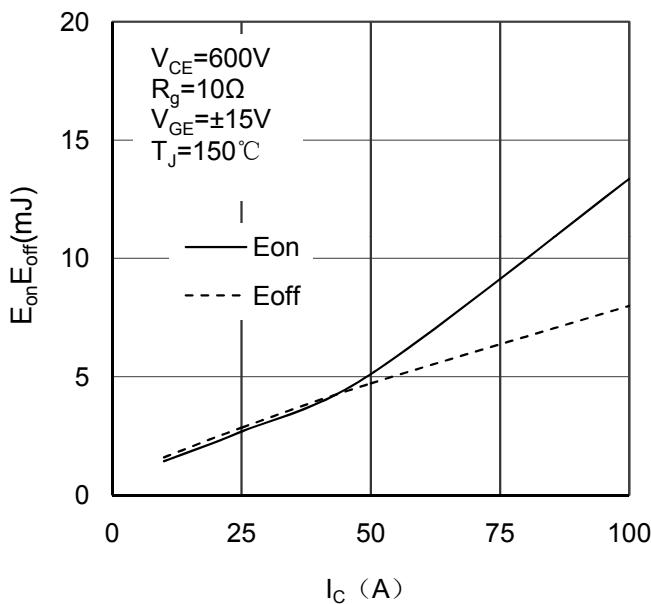


Figure 5. Switching Energy vs Collector Current IGBT-inverter

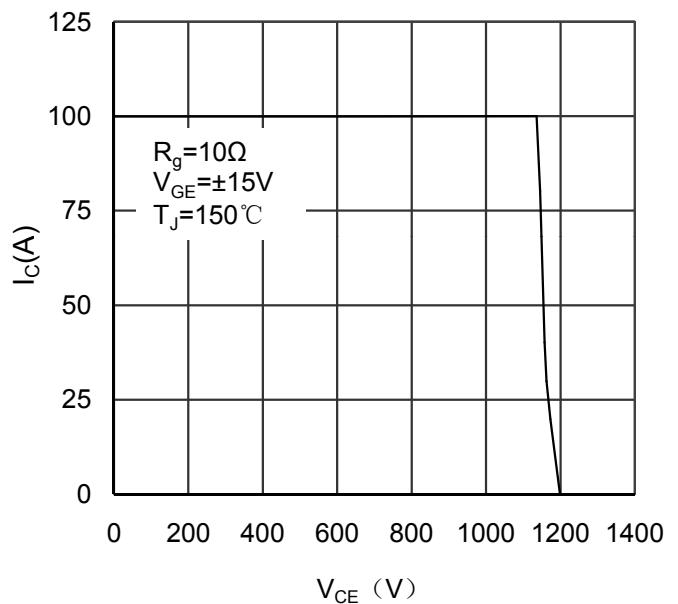


Figure 6. Reverse Biased Safe Operating Area IGBT-inverter

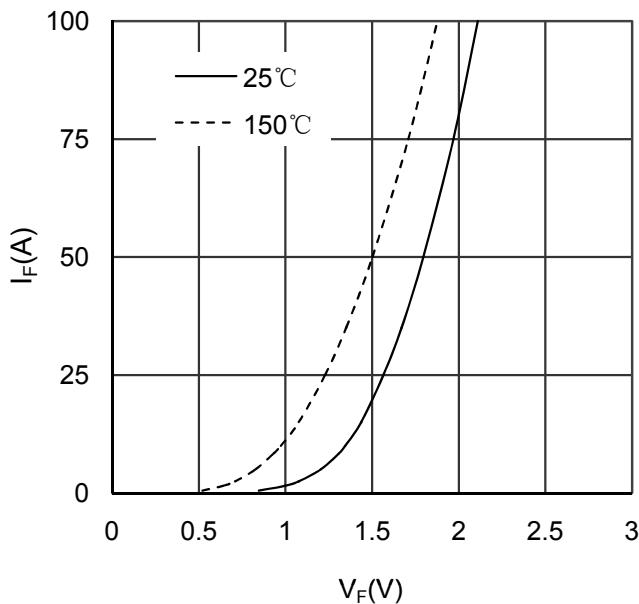


Figure 7. Diode Forward Characteristics Diode -inverter

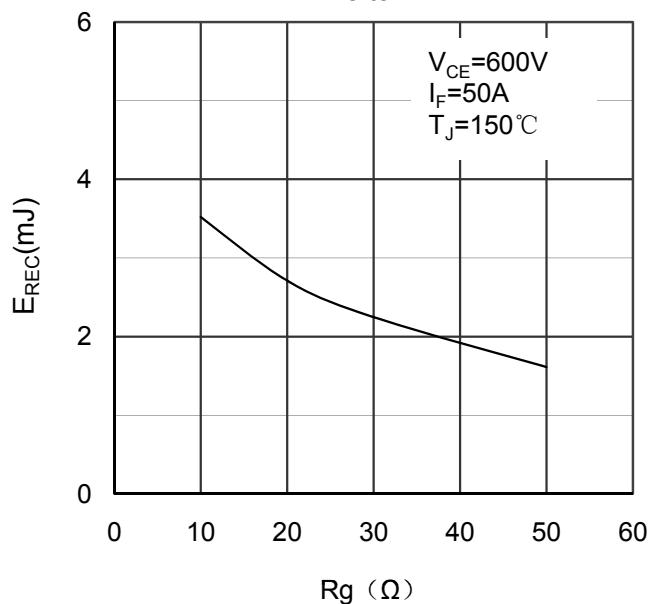
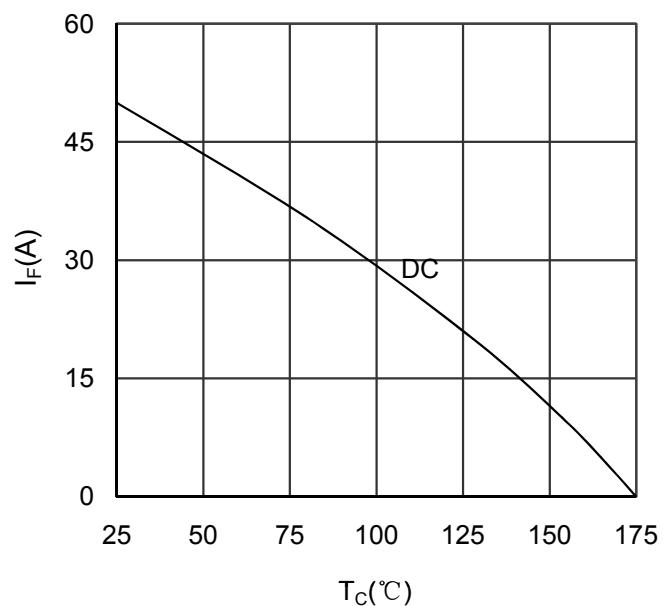
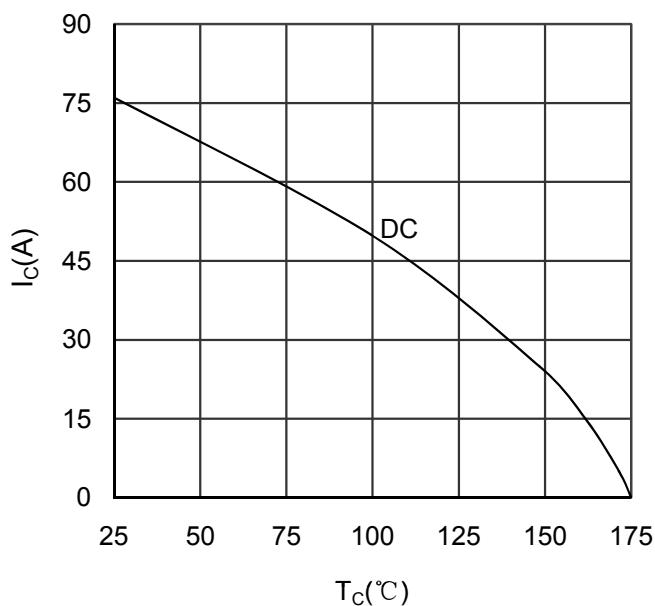
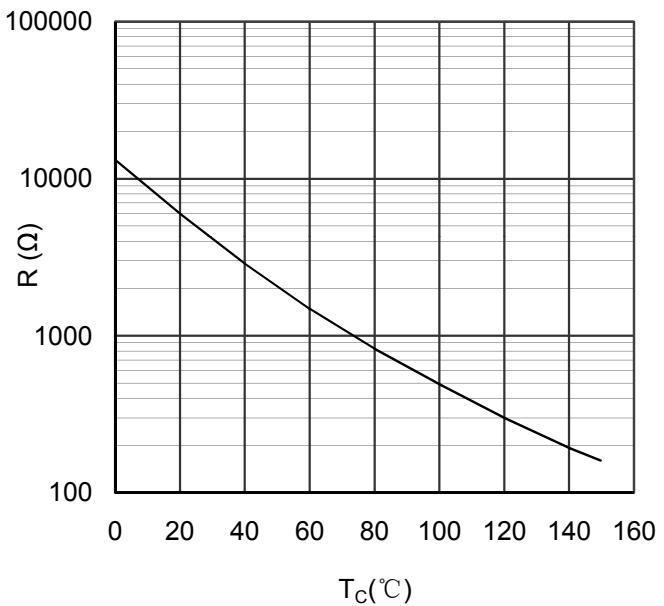
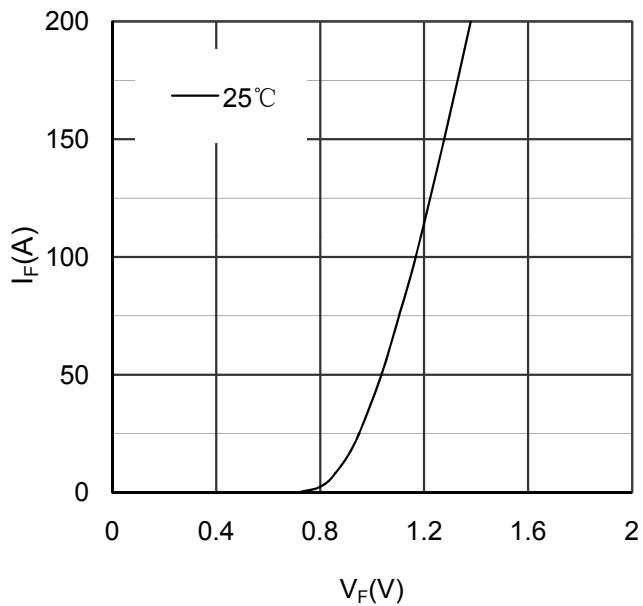
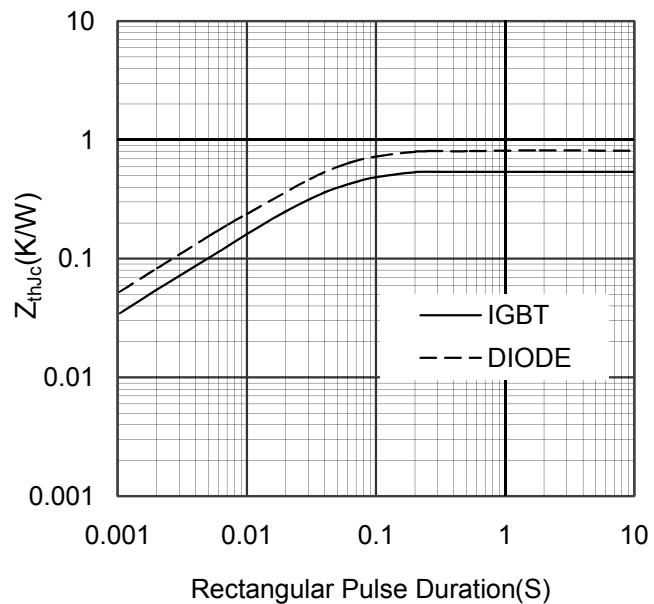
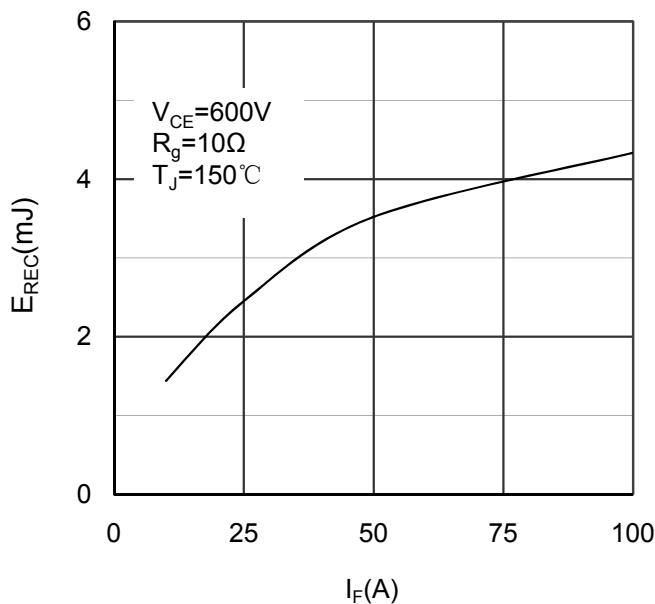


Figure 8. Switching Energy vs Gate Resistor Diode -inverter




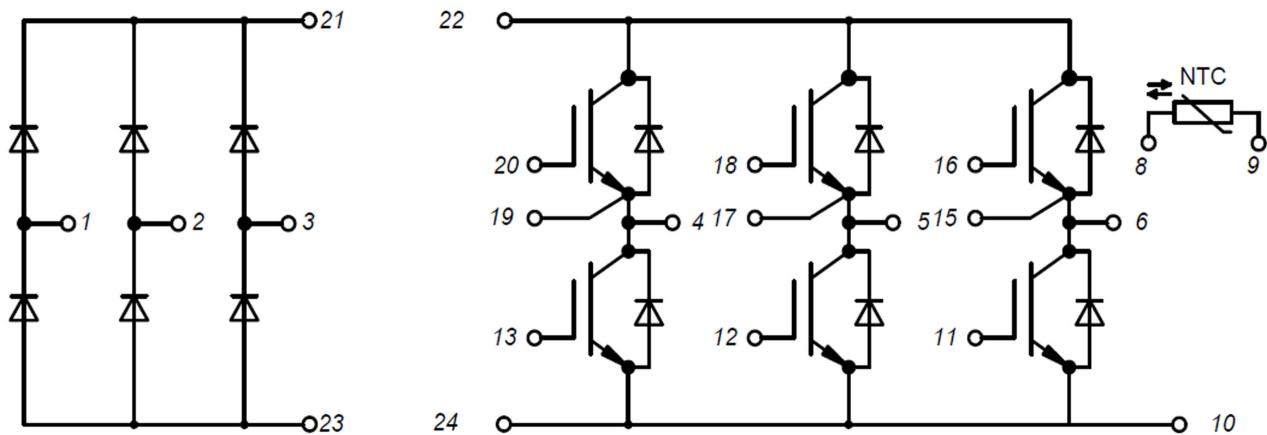


Figure 15. Circuit Diagram

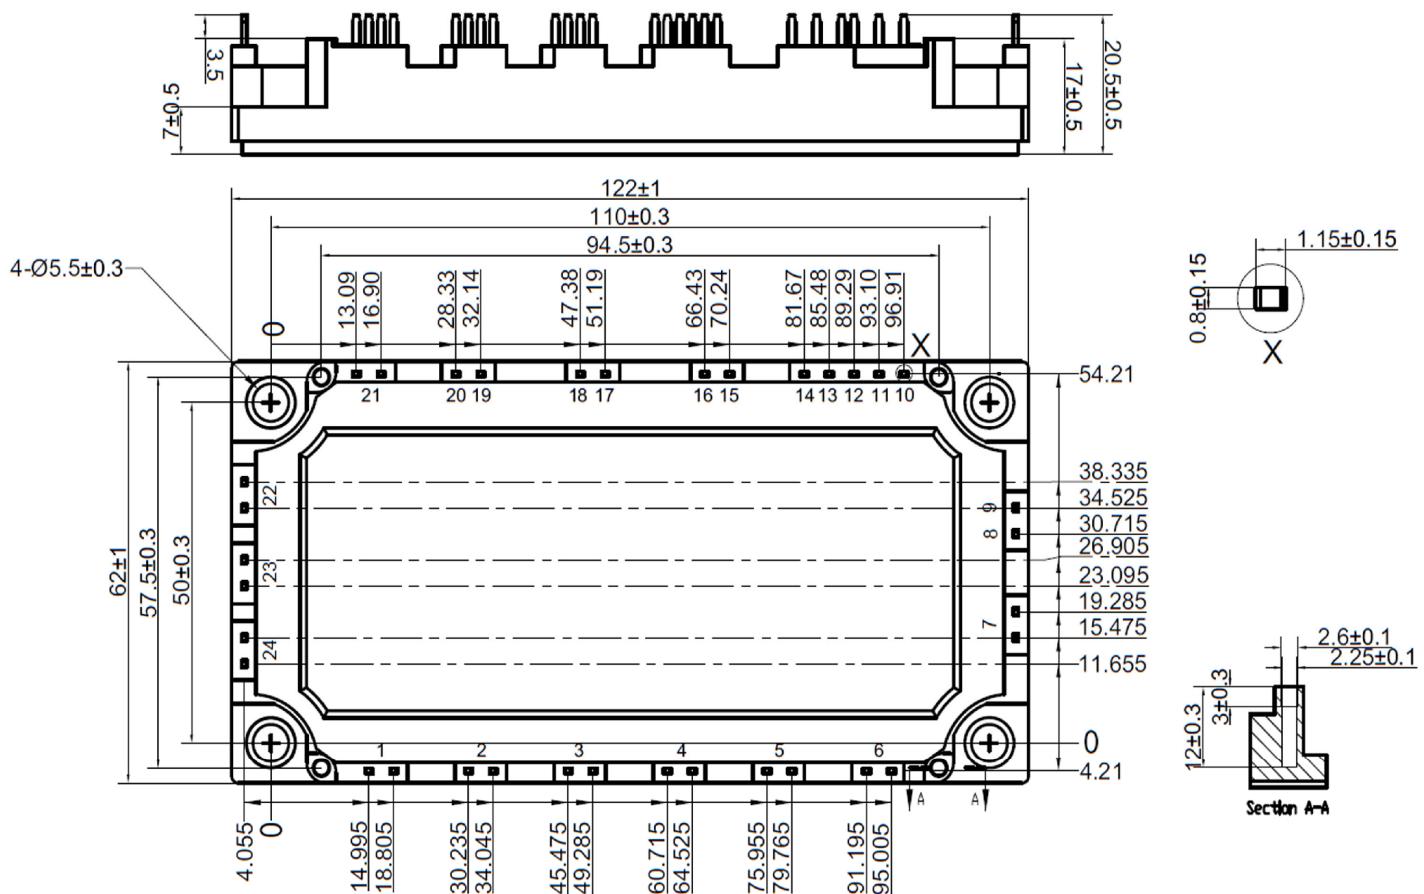

Dimensions in (mm)

Figure 16. Package Outline